

Knapsack Sprayer

PIC	NAME / MODEL	SPECIFICATION	PACKING SIZE (mm)	QUANTITY (pcs)
	IF-16C-1	N.W: 3.2kg G.W: 4.05kg Capacity: 16L Tank Material: pp Working Pressure: 0.2-0.4Mpa Side: Transparent water level line	420*180*583 Packing: 1pc/color box	40HQ: 1600 20GP: 680
	IF-20C-1	N.W: 3.35kg G.W: 4.2kg Capacity: 20L Tank Material: pp Working Pressure: 0.2-0.4Mpa Side: Transparent water level line	450*195*583 Packing: 1pc/color box	40HQ:1375 20GP: 590
	IF-16G-1	N.W: 2.6kg G.W: 3.2kg Capacity: 16L Tank Material: PP Working Pressure: 0.2-0.4Mpa	370*195*515 Packing: 1pc/color box	40HQ: 1920 20GP: 800
	IF-16D-1	N.W: 2.8kg G.W: 3.4kg Capacity: 16L Tank Material: PE Working Pressure: 0.2-0.4Mpa Lance: SS Lance	370*185*525 Packing: 1pc/color box	40HQ: 2000 20GP: 800
	IF-20D-1	N.W: 3.1kg G.W: 3.7kg Capacity: 20L Tank Material: PE Working Pressure: 0.2-0.4Mpa Lance: SS Lance	390*195*525 Packing: 1pc/color box	40HQ: 1730 20GP: 730

Electric Sprayer

PIC	NAME / MODEL	SPECIFICATION	PACKING SIZE (mm)	QUANTITY (pcs)
	IF-20EM-1	N.W: 5.5kg G.W: 6.5kg Capacity: 20 L Tank Material: PE Working Pressure: 0.2-0.4Mpa Lead-Acid Battery: 12V/8AH detachable, Panasonic Technology (working 5 hours) Lance: Adjustable SS lance Pressure pump: 3.1L/min	335*250*595 Packing: 1pc/color box	40HQ: 1320 20GP: 570
	IF-20EM-2	N.W: 5kg G.W: 6kg Capacity: 20L Tank Material: HDPE Working Pressure: 0.2-0.4Mpa Li-ion Battery: 11.1V/6.6AH detachable(working 2-3 hours) Lance: SS lance Pressure pump: 3.1L/min	320*275*615 Packing: 1pc/color box	40HQ: 1280 20GP: 540
	IF-5EU-1 (ULV)	Work Voltage(9V/DC) : 6—12V Flow Rate: 25—200ml/min Disc Speed: >=2000rpm Droplet Size: 50—150um Big Tank Volume: 5L Small Tank Volume: 1L Dry Battery: 4-8pcs	Shaft Carton Size: 970*160*160 Tank Carton Size: 250*190*280	40HQ:1800 20GP:770

Solar LED Wall Light

PIC	NAME / MODEL	SPECIFICATION	PACKING SIZE (mm)
	IF-LED-1	Name: Solar Sensor Wall Light N.W: 190g Material: ABS Power: 0.2W Power Supply: Solar Size: 94*124*48mm Solar panel: 5.5V/0.55W Color temperature: 6500K LEDS: SMD2835 20LEDS LED span life: 50000Hours Solar charging time: 5-8Hours Li-ion battery: 3.7V/1200mAh Application: Garden, Yard, Park, Road, Indoor/Outdoor	103*130*53 Packing: 1pc/ box
	IF-LED-2	Name: 3 Sides View LED Wall Light with Magnet N.W: 200g/420g Material: ABS+PC Power: 2W/5W Work Time: 8Hour Power Supply: Solar Solar Panel: 0.8W/2W Battery: 2000mAh/4000mAh Color Temperature: 3000-6000K LEDS: SMD2835 37LEDS/73LEDS Size: 175*75*50mm/250*105*65mm Application: Garden, Yard, Park, Road, Indoor /Outdoor	185*90*60/ 261*117*81 Packing: 1pc/ box

Pressure Sprayer

PIC	NAME / MODEL	SPECIFICATION	PACKING SIZE (mm)	QUANTITY (pcs)
	IF-1A-2	N.W: 0.29kg Capacity: 1L Material Body: HDPE Working Pressure: 1.0-4.0Bar Suitable for: 5m ² -12m ²	570*450*305 Packing: 20PCS/CTN	40HQ: 17800 20GP: 7500
	IF-1.5A-2	N.W: 0.325kg Capacity: 1.5L Material Body: HDPE Working Pressure: 1.0-4.0Bar Suitable for: 7.5m ² -18m ²	635*520*320 Packing: 20PCS/CTN	40HQ: 13100 20GP: 5600
	IF-2A-2	N.W: 0.355kg Capacity: 2L Material Body: HDPE Working Pressure: 1.0-4.0Bar Suitable for: 10m ² -24m ²	670*540*345 Packing: 20PCS/CTN	40HQ: 11400 20GP: 4400
	IF-1.5E-1	Capacity: 1.5L Material Body: HDPE Side: Ttransparent water level line Spare Parts: Stainless lance with adjustable nozzle	665*545*330 Packing: 20PCS/CTN	40HQ: 11600 20GP: 4800
	IF-2E-1	Capacity: 2L Material Body: HDPE Side: Ttransparent water level line Spare Parts: Stainless lance with adjustable nozzle	665*545*330 Packing: 20PCS/CTN	40HQ: 11600 20GP: 4800


	IF-5C-1	N.W: 0.875kg Capacity: 5L Material Body: HDPE Working Pressure: 2.5Bar Suitable for: 25m ² -60m ²	560*375*435 Packing: 6PCS/CTN	40HQ: 4560 20GP: 1920
	IF-8C-1	N.W: 1.16kg Capacity: 8L Material Body: HDPE Working Pressure: 2.5Bar Suitable for: 40m ² -100m ²	560*375*550 Packing: 6PCS/CTN	40HQ: 3528 20GP: 1530

Power Sprayer

PIC	NAME / MODEL	SPECIFICATION	PACKING SIZE (mm)	QUANTITY (pcs)
	IF-3WZ-768-140FA	N.W: 9.7kg G.W: 13kg Tank Capacity: 25L Fuel Capacity: 0.63L Matched Engine: 140FA Working Pressure: 1.5-5.0Mpa/6300rpm Displacement: 37.7cc Water Outflow: 7.1L/Min(6300rpm/h) Borexstroke: 39*30mm Max Power: 1.0km/7.000rpm Ignition System: CDI Spark Plug: CM5H Engine Type: Air-forced 4 stroke OHC	390*470*620 Packing: 1PC/CTN	40HQ: 570 20GP: 216
	IF-3WZ-6	N.W: 9kg G.W: 12kg Tank Capacity: 25L Matched Engine: 1E34F Working Pressure: 1.0-2.5Mpa Displacement: 25.4cc Standard Power: 0.75/7500kw/r/min Mixed Fuel Ratio: 25:1 Method of Starting: Recoil Starting	470*370*675 Packing: 1PC/CTN	40HQ: 460 20GP: 220

Mist Dusters

PIC	NAME / MODEL	SPECIFICATION	QUANTITY (pcs)
	IF-14MA-1 3WF-3 (14/16/20/26L)	N.W: 11kg G.W: 14.5kg Fan Rotation Speed: 7500r/min Tank Capacity: 14L Range: $\geq 12M$ Matched Engine: 1E40FP-3Z Displacement: 41.5cc Standard Power: 2.13/7500kw/r/min Fuel Consumption: 530g/kw·h Mixed Fuel Ratio: 25:1 Method of Starting: Recoil Starting Igniting Mode: No Touch of Ignition	14L 40HQ: 485 20GP: 190
			16L 40HQ: 450 20GP: 180
			20L 40HQ: 450 20GP: 180
			26L 40HQ: 393 20GP: 160
	IF-14MA-2 3WF-3A (14/16/20/26L)	N.W: 11kg G.W: 14.5kg Fan Rotation Speed: 6000r/min Tank Capacity: 14L Range: $\geq 12M$ Engine Type: GX35 Matched Engine: 140FA(4 stroke) Displacement : 38cc Standard Power: 1.0/6000kw/r/min Method of Starting: Recoil Starting Igniting Mode: No Touch of Ignition	14L 40HQ: 485 20GP: 210
			16L 40HQ: 450 20GP: 180
			20L 40HQ: 450 20GP: 180
			26L 40HQ: 393 20GP: 160

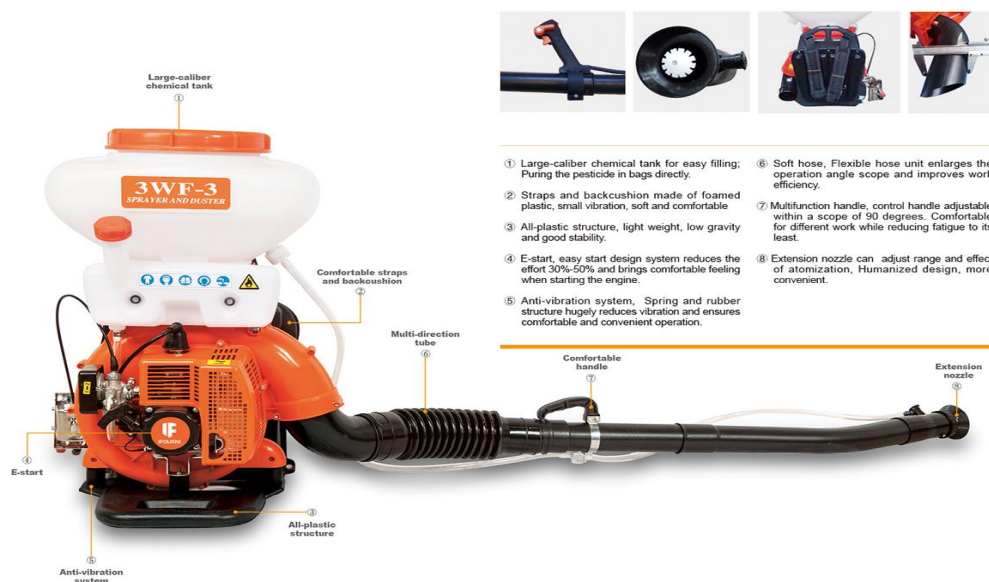

Spraying Machinery

PIC	NAME / MODEL	SPECIFICATION	PACKING SIZE (mm)	QUANTITY (pcs)
	200L	N.W: 70kg G.W: 82.5kg Standard Flow: 30-40L/min Matched Engine: 170F Working Pressure: 1.0-2.5Mpa Max. Range: 15M Tank Capacity: 200L	1590*690*840 Packing: 1PC/CTN	40HQ: 69 20GP: 22
	300L	N.W: 93kg G.W: 106kg Standard Flow: 30-40L/min Matched Engine: 170F Working Pressure: 1.0-2.5Mpa Max. Range: 15M Tank Capacity: 300L	1670*720*930 Packing: 1PC/CTN	40HQ: 42 20GP: 20
	IF-3WPZ-700G	Standard Power: 36.8/2400kw/r/min (50HP) Tank Capacity: 700L Working pressure: 0.2-0.5Mpa Matched Engine: Four-cylinder, Four-stroke water-cooled diesel engine Sprinkler type: Fan nozzle Spraying width: 12000mm The flow of the pump: 45-63L/min Ground clearance: 1100mm Wheelbase: 2050mm Before and after the maximum Track: 1500mm Front wheel outer Diameter: 940mm Front tire width: 120mm Rear wheel outer Diameter: 940mm Rear tire width: 120mm Tyre type: Pneumatic tire Brake form: Moisture friction brake Clutch form: Pressure plate type Driving method: Four-wheel drive Speed: 1 gear: 4.5km/h 2 gear: 7km/h 3 gear: 18km/h R gear: 4km/h	—	20GP:1

Wading Boots

PIC	NAME / MODEL	SPECIFICATION	MINI QUANTITY (pcs)
	IF-PVC-1	Height: 385mm Weight: 1.6kg/pair Size: 37-47# Color: Green upper + Black outsole Material: PVC Thickness: about 1.7-2mm 15pairs/CTN Packing Size: 37-43#: 50*29*57cm 44-47#: 50*31*57cm	1000
	IF-PVC-2	Height: 385mm Weight: 1.6kg/pair Size: 37-47# Color: Green upper + Rice yellow outsole Material: PVC Thickness: about 1.7-2mm 15pairs/CTN Packing Size: 37-43#: 50*29*57cm 44-47#: 50*31*57cm	1000
	IF-PVC-3	Height: 385mm Weight: 1.6kg/pair Size: 37-47# Color: White Material: PVC Thickness: about 1.7-2mm 15pairs/CTN Packing Size: 37-43#: 50*29*57cm 44-47#: 50*31*57cm	1000
	IF-PVC-4	Height: 385mm Weight: 1.6kg/pair Size: 37-47# Color: Yellow upper + Black outsole Material: PVC Thickness: about 1.7-2mm 15pairs/CTN Packing Size: 37-43#: 50*29*57cm 44-47#: 50*31*57cm	1000



IFOURNI COMPANY LIMITED

Address: Room 4057, Tower B1, Huishang Plaza, Saihan District, Hohhot, Inner Mongolia, China

Tel: +86-471-3242004

Website: www.ifourni.com

Wading Boots

PIC	NAME / MODEL	SPECIFICATION	MINI QUANTITY (pcs)
	IF-PVC-5	Height: 385mm Weight: 1.6kg/pair Size: 37-47# Color: Black Material: PVC Thickness: about 1.7-2mm 15pairs/CTN Packing Size: 37-43#: 50*29*57cm 44-47#: 50*31*57cm	1000